



Helios Injection Systems
100 NE McClary Rd
Cordell, OK 73632
Ph:580-832-5475 Fax:580-832-5471
sales@heliospumps.com

Motor

- C1D2 1/4 HP – 60RPM

Fluid Ends

- 316 Stainless Steel
- Teflon Seat SS Check Valve
- 3/4" & 1" Head Assemblies Available

Plungers

- 1/4", 3/8", 1/2", 3/4", or 1"
316 Stainless Steel
- 6 Position Variable Displacement
Follower

Power Option


- 120VAC C1D1 Receptacle

Controller

- Helios True Timer in C1D2 Enclosure
- Temperature Control Standard

Upgrades

- Add a Head
- Ceramic Plungers
- Extreme Packing
- Triplex or Quadraplex

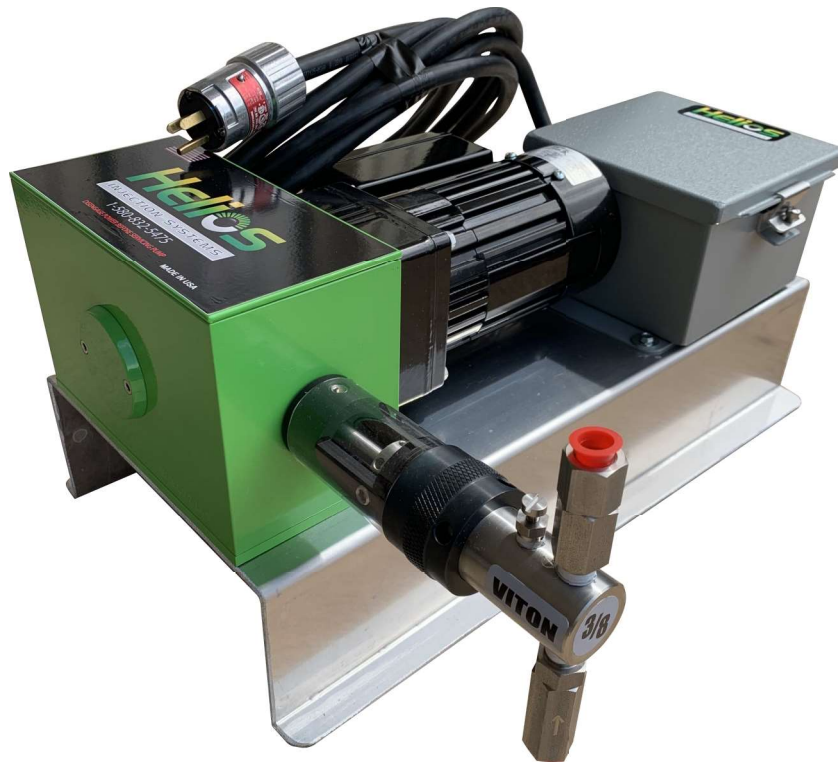

5000AC Hazardous Location Pump

Boxer 5000 Single Head Injection Rates @ 1500psi

