

5000 AC-HL TRIPLEX HEAD PUMP

The Helios 5000AC-HL Triplex Head Pump showcases a wide range of user-friendly characteristics and highly efficient repair capabilities. With its maximum pressure rating of 5000PSI, this pump delivers flexible injection rates, spanning from 1 pint to 363 gallons per day per fluid head.

WORK. SIMPLY.

KEY FEATURES

6 Position Variable Displacement Follower
~ Reduces Volume by 12% for Each Position

316 Stainless Steel "Fast Pack" Fluid Head
~ Reduce Packing Replacement Time by 50%

Check Valves Include Tungsten Carbide Balls & Teflon Seals

Heavy Duty Sealed Ball Bearing Cam


Continuous 5/8" Keyed Driveshaft w/ Front Support Bearing

O-Ring Sealed Lid

Remote Automation Control & Tank Level Monitoring

Temperature Control

5000 Series Single Head Injection Rates

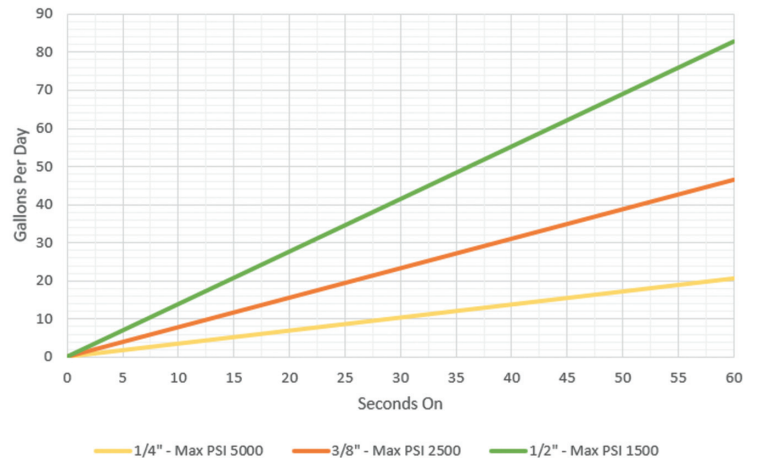

MOTOR: Class 1 Div. 2 1/5 HP - 60RPM 115VAC

FLUID ENDS: 316 Stainless Steel, Teflon Seat SS Check Valve

PLUNGERS: 1/4", 3/8", 1/2", 3/4", or 1" 316 Stainless Steel

PACKING TYPES: Buna, Viton, HNBR, & ETP

CONTROLLER: Helios Tru Timer inside a NEMA 4X Enclosure :
Includes Temperature Control

UPGRADES: Ceramic Coated Plungers, & Hastelloy, PPS Plastic,
3/4" & 1" Fluid Head Assemblies Available

WEIGHT: 57.3 lbs

DIMENSIONS: 24 x 21.5 x 9 in



www.heliospumps.com Visit us online to find a Helios location near you.